


40V N-Channel Mosfet

FEATURES

- $R_{DS(ON)} \leq 6.5m\Omega$  (5.0m $\Omega$  Typ.)  
@ $V_{GS}=10V$
- $R_{DS(ON)} \leq 10.5m\Omega$  (7.5m $\Omega$  Typ.)  
@ $V_{GS}=4.5V$
- AEC Q101 qualified
- Green Product (RoHS compliant)
- 100% UIS TEST

PDFN5\*6-8L




1: S 3: S 5: D 7: D  
2: S 4: G 6: D 8: D

APPLICATIONS


- Automotive Windows
- Synchronous rectification
- PWM Applications

MARKING



YYMM:Date Code(year & month)

N-CHANNEL MOSFET



MAXIMUM RATINGS (Tc=25°C unless otherwise noted)

Symbol	Parameter	Max.	Units
$V_{DS}$	Drain-Source Voltage	40	V
$V_{GS}$	Gate-Source Voltage	±20	V
$I_D$	Drain Current	1.1	A
$I_{DM}$	Pulsed Drain Current <sup>note1</sup>	260	A
$T_J$	Operating Temperature	50	°C
$E_{AS}$	Single Pulsed Avalanche Energy <sup>note2</sup>	100	mJ
$T_J, T_{STG}$	Operating and Storage Temperature Range	-55 to +175	°C

## MOSFET ELECTRICAL CHARACTERISTICS Tc=25 °C unless otherwise specified

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Units
Off Characteristic						
V <sub>(BR)DSS</sub>	Drain-Source Breakdown Voltage	V <sub>GS</sub> = 0V, I <sub>D</sub> = 250μA	40	-	-	V
I <sub>DSS</sub>	Zero Gate Voltage Drain Current	V <sub>DS</sub> = 40V, V <sub>GS</sub> = 0V, T <sub>J</sub> = 25°C	-	-	1	μA
I <sub>GSS</sub>	Gate to Body Leakage Current	V <sub>GS</sub> = ±20V, V <sub>DS</sub> = 0V	-	-	±100	nA
On Characteristics						
V <sub>GS(th)</sub>	Gate Threshold Voltage	V <sub>DS</sub> = V <sub>GS</sub> , I <sub>D</sub> = 250μA	1.0	1.6	2.5	V
R <sub>DS(on)</sub>	Static Drain-Source On-Resistance <sup>note3</sup>	V <sub>GS</sub> = 10V, I <sub>D</sub> = 30A	-	5.0	6.5	mΩ
		V <sub>GS</sub> = 4.5V, I <sub>D</sub> = 20A	-	7.5	10.5	mΩ
Dynamic Characteristics <sup>note4</sup>						
C <sub>iss</sub>	Input Capacitance	V <sub>DS</sub> = 20V, V <sub>GS</sub> = 0V f = 1.0MHz	-	1102	-	pF
C <sub>oss</sub>	Output Capacitance		-	433	-	pF
C <sub>rss</sub>	Reverse Transfer Capacitance		-	115	-	pF
R <sub>g</sub>	Gate resistance	V <sub>GS</sub> =0V, V <sub>DS</sub> =0V, f=1MHz	-	4.2	-	Ω
Q <sub>g</sub>	Total Gate Charge	V <sub>DS</sub> =20V, I <sub>D</sub> =30A V <sub>GS</sub> =10V	-	15.1	-	nC
Q <sub>gs</sub>	Gate-Source Charge		-	4.5	-	nC
Q <sub>gd</sub>	Gate-Drain(“Miller”) Charge		-	1.8	-	nC
Switching Characteristics <sup>note4</sup>						
t <sub>d(on)</sub>	Turn-On Delay Time	V <sub>GS</sub> = 10V, V <sub>DS</sub> = 20V R <sub>G</sub> = 3Ω, I <sub>D</sub> = 30A	-	8.5	-	ns
t <sub>r</sub>	Turn-On Rise Time		-	6.5	-	ns
t <sub>d(off)</sub>	Turn-Off Delay Time		-	30	-	ns
t <sub>f</sub>	Turn-Off Fall Time		-	8.1	-	ns
Drain-Source Diode Characteristics and Maximum Ratings						
V <sub>SD</sub>	Drain to Source Diode Forward Voltage	V <sub>GS</sub> = 0V, I <sub>SD</sub> = 30A T <sub>J</sub> = 25°C	-	-	1.2	V

Notes:1. Repetitive Rating: Pulse Width Limited by Maximum Junction Temperature

2. EAS condition  $T_J=25^\circ C, V_{DD}=20V, V_G=10V, I_D=20A, L=0.5mH$

3. Pulse Test: Pulse Width $\leq 300\mu s$ , Duty Cycle $\leq 2\%$

4. Guaranteed by design, not subject to production testing

# TYPICAL PERFORMANCE CHARACTERISTICS

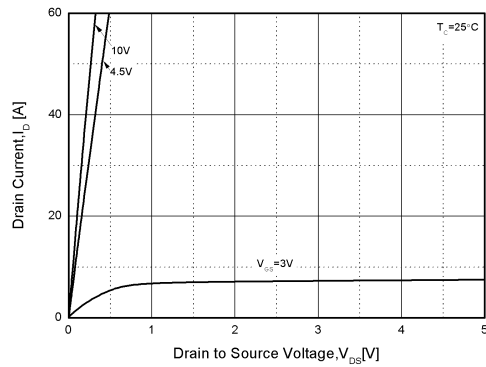


Figure1. Output Characteristics

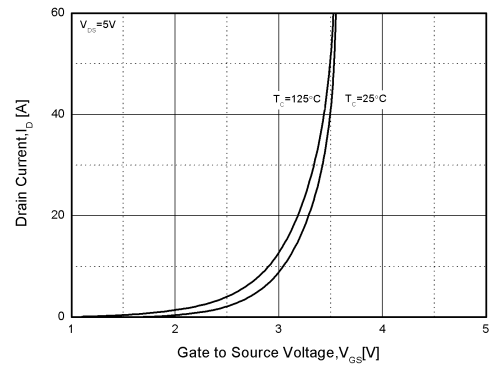


Figure2. Transfer Characteristics

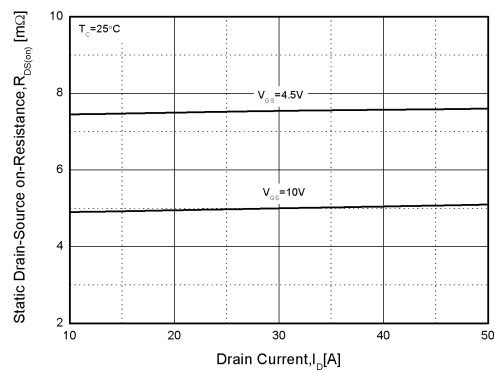


Figure3. Rdson-Drain Current

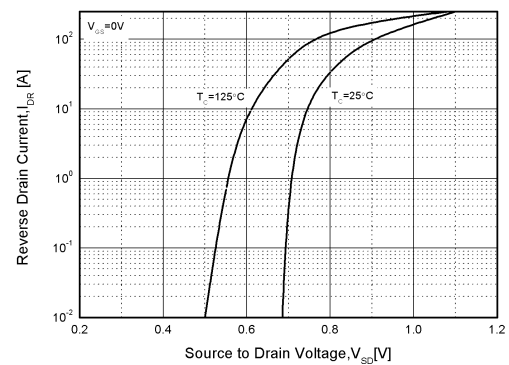


Figure4. Typical Source-Drain Diode Forward Voltage

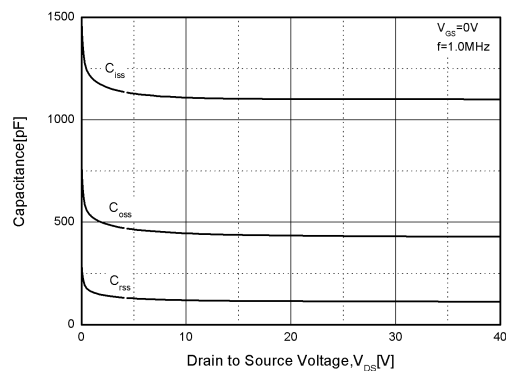


Figure5. Capacitance Characteristics

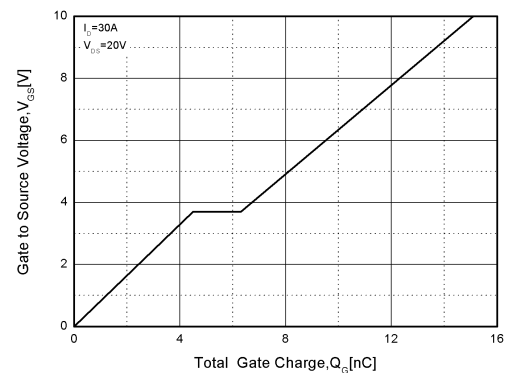


Figure6. Gate Charge

TYPICAL PERFORMANCE CHARACTERISTICS (cont.)

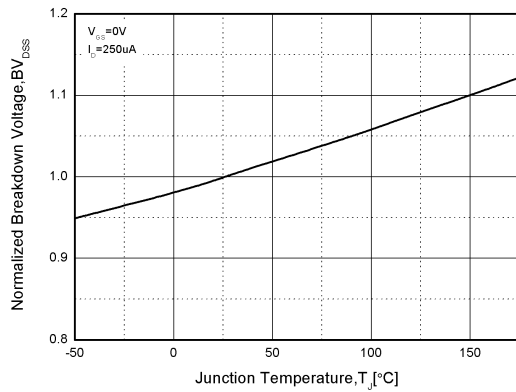


Figure7. Normalized Breakdown Voltage vs. Temperature

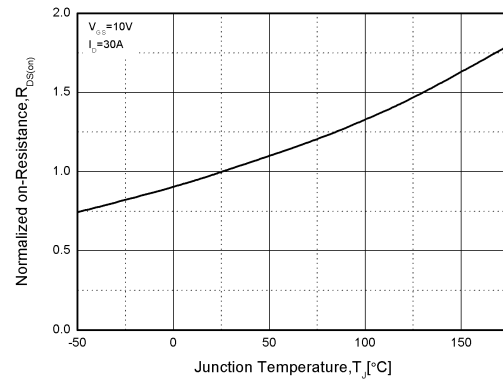


Figure8. Normalized on Resistance vs. Temperature

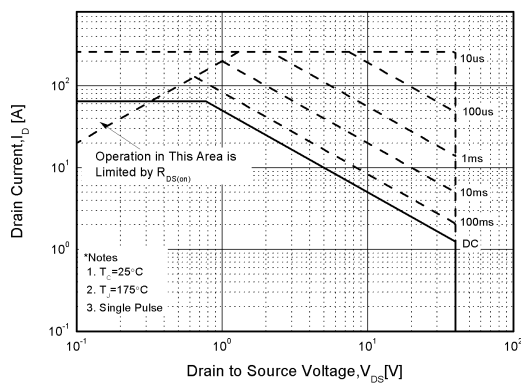


Figure9. Safe Operation Area

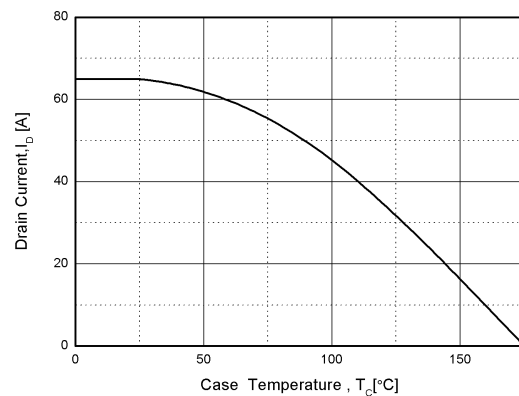


Figure10. Drain Current vs. Case Temperature



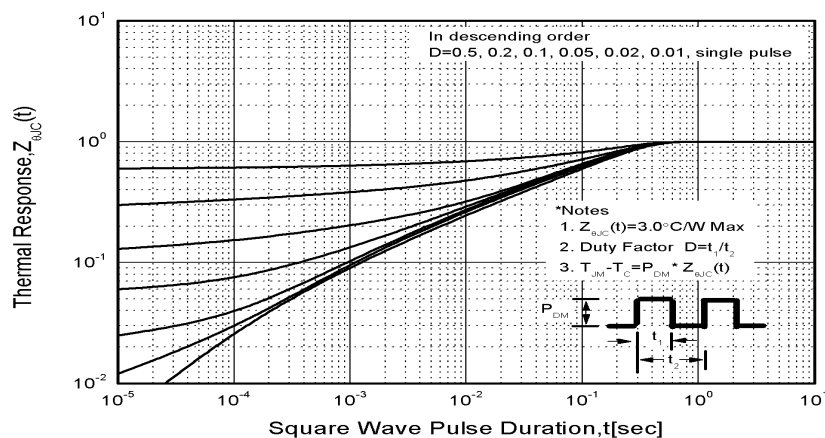


Figure11. Transient Thermal Response Curve


## PDFN5\*6-8L PACKAGE OUTLINE DRAWING

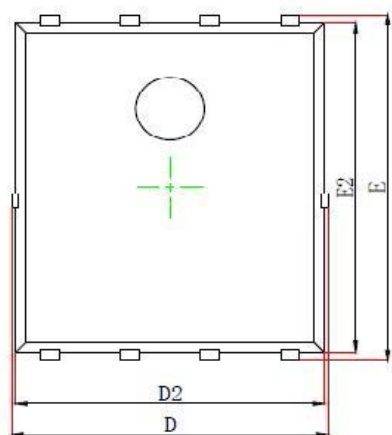

Top View  
[顶视图]

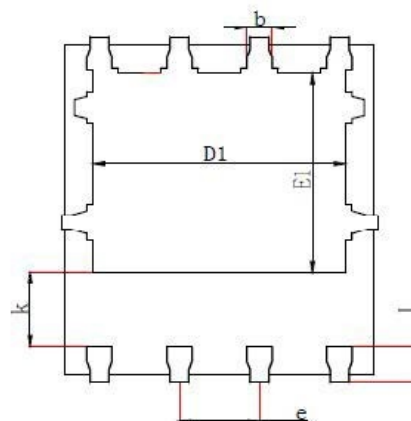

Bottom View  
[背视图]

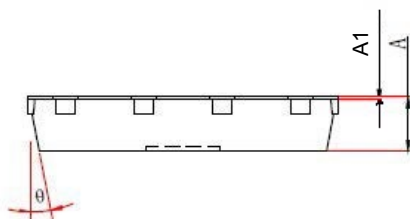

Side View  
[侧视图]

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.800	1.100	0.031	0.043
A1	0.000	0.05	0.000	0.002
D	-	5.4	-	0.212
E	-	6.200	-	0.244
D1	3.900	4.200	0.153	0.165
E1	3.350	3.650	0.132	0.144
D2	4.800	5.100	0.189	0.201
E2	5.674	5.950	0.223	0.234
k	1.100	1.500	0.043	0.059
b	0.250	0.490	0.010	0.019
e	1.170	1.370		
L	0.510	0.711	0.020	0.028
θ	6°	14°	6°	14°